



N : DoP CERTILIGHT OFE\_indE


## DECLARATION OF PERFORMANCE OF SMOKE AND HEAT CONTROL SYSTEMS

**Free Aerodynamic surface calculation :**


$A_a = A_v^* \times C_v^{**}$  or NPD

$A_v^* = A_t \times B_t = [\text{side A} - 0,181 \text{ m}] \times [(\text{side B} \times 2) - 0,181 \text{ m}]$

CERTILIGHT WITHOUT UPSTAND

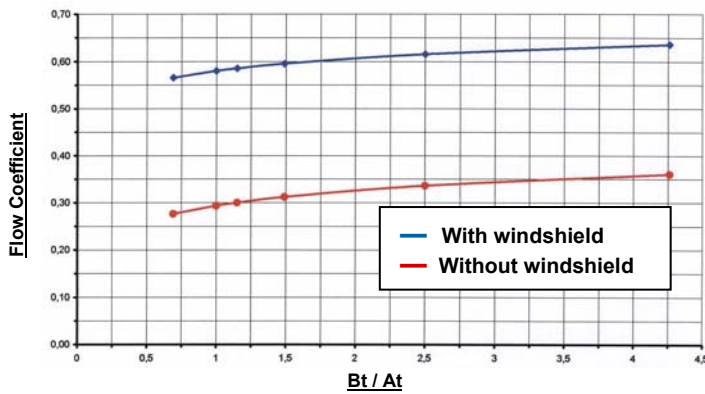

CERTILIGHT WITH UPSTAND

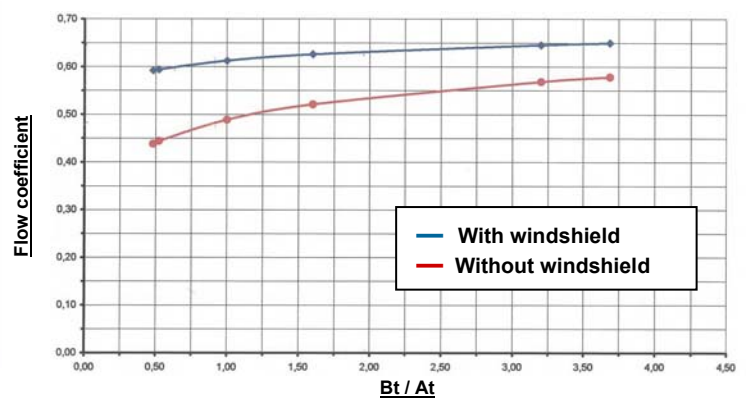

**\*\*\*Determination of the snowload classification :**

Side A parallel to the hinges :  $0,95\text{m} \leq A \leq 2,530\text{m}$

Side B parallel to the hinges :  $0,7\text{m} \leq B \leq 1,6\text{m}$

**Side A ≤ 1600 (1 motor per leaf)**

700 ≤ Side B ≤ 900		901 ≤ Side B ≤ 1200		1201 ≤ Side B ≤ 1600	
A <sub>v</sub>	Performance	A <sub>v</sub>	Performance	A <sub>v</sub>	Performance
0,93 to 1,37 m <sup>2</sup>	SL 500	1,24 to 1,34 m <sup>2</sup>	SL 1000	1,70 to 2,55 m <sup>2</sup>	SL 500
1,37 to 2,29 m <sup>2</sup>	SL 250	1,34 to 2,34 m <sup>2</sup>	SL 500	2,55 to 3,77 m <sup>2</sup>	SL 250
		2,34 to 3,14 m <sup>2</sup>	SL 250	3,77 to 4,28 m <sup>2</sup>	SL 150

**Side A > 1600 (2 motors per leaf)**

700 ≤ Side B ≤ 900		901 ≤ Side B ≤ 1200		1201 ≤ Side B ≤ 1600	
A <sub>v</sub>	Performance	A <sub>v</sub>	Performance	A <sub>v</sub>	Performance
1,73 to 3,02 m <sup>2</sup>	SL 500	2,30 to 2,76 m <sup>2</sup>	SL 1000	3,15 to 4,27 m <sup>2</sup>	SL 500
3,02 to 3,26 m <sup>2</sup>	SL 250	2,76 to 4,48 m <sup>2</sup>	SL 500	4,27 to 6 m <sup>2</sup>	SL 250

10. The performance of the product identified in points 1 et 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by: **David Maillart – R&D Manager**

The 17/04/2023  
In Collégien