

DECLARATION OF PERFORMANCE OF SMOKE AND HEAT CONTROL SYSTEMS

1. *Unique identification code of the product-type:* **OTF OSPI**
2. *Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11 paragraph 4:*
Information given on the tracking label :
Order confirmation Number + Product Number + Date of production
3. *Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer :*
 - 3.1. Product description :** *Natural smoke and heat exhaust ventilator with a single casement, for wall installation on a horizontal axis on the outside in a bottom or top hung opening configuration, or on a vertical axis, outwards side hung opening style. The infill can be in cellular polycarbonate, in glass or insulated double skin aluminium (thermally or acoustically).*
 - 3.2. Installation and implementation conditions in accordance with the certified performance**
 - Wall installation ($\pm 5^\circ$)
 - Dimensional range: (Hht and Lht are the overall dimensions of the product)
 $0,666 \leq Hht \leq 1,716$ m and $0,666 \leq Lht \leq 2,516$ m. With $0,30 \leq A_v^* \leq 2,88$ m²
* OTF OSPI: $A_v = Lpa \times Hpa$ ($Lpa = Lht - 0,144$ m et $Hpa = Lpa - 0,144$ m)
 - 3.3. Mode of operation:** Pneumatic opening only
Service pressure 6 to 20 bars (cylinder volume: 0,12NI under 10 bars)
 - 3.4. Possible options :**
Open / Close position switches
Thermal device release (according to the current standard).
4. *Name, registered trade name or trademark , in conformity with article 11, paragraph 5:*

Company name : SOUCHIER – BOULLET SAS Parc Segro – 42 rue de Lamirault CS 20762 77090 COLLEGIEN France	Production unit : SOUCHIER SAS 11 rue du 47 ^{ème} R.A. 70400 HERICOURT France
---	--
6. *7. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V :*
The notified body **TÜV Rheinland N° 0336** performed the determination of the product type on the basis of type testing, type calculation of the product, the initial inspection of the manufacturing plant and the factory production control and the continuous surveillance, assessment and evaluation of the factory production control under system 1 and issued the certificate of constancy of performance N°.

Certificat CE N° 0336 – RPC – 6742-3.

9. Declared performances :

	Essential characteristics	Performance
Harmonised technical specification: EN 12101-2:2003	Nominal activation conditions / sensitivity, as: Initiation device Opening mechanism Inputs and outputs	present present present
	Response delay (response time), as: Reliability Opening under (snow, wind) load Low ambient temperature Fire Performance	 ≤ 60 s
	Operational reliability, as: Reliability	Re 1000, Type A
	Effectiveness of smoke/hot gas extraction, as: Aerodynamic free area (See page 3)	$A_v = A_v^* \times C_v^{**}$
	Performance parameters under fire conditions, as: Resistance to heat Mechanical stability Reaction to fire Panel or glass insulated Polycarbonate	 A1 B-s1;d0
	Performance under environmental conditions, as: Opening under load Low ambient temperature Stability under wind load Resistance to wind-induced vibration (where included) Resistance to heat	 SL NPd T(00) WL 1500 NPd B ₃₀₀ 30
	Durability, as: Response delay (response time) Operational reliability Performance parameters under fire conditions	 ≤ 60 s Re 1000 ≤ 60 s; $\Delta A_{thrust} < 10\%$




Free aerodynamic surface calculation

$$A_a = A_v \times C_v^{**}$$




$$A_v = Lpa \times Hpa$$

DECLARATION OF PERFORMANCE OF SMOKE AND HEAT CONTROL SYSTEMS

**** Cv : Calculation of flow coefficient Without the influence of the "mullion-transom-construction":**

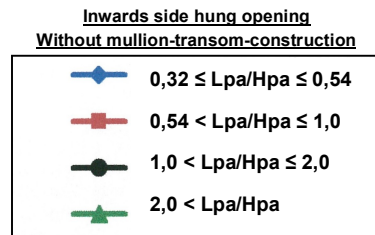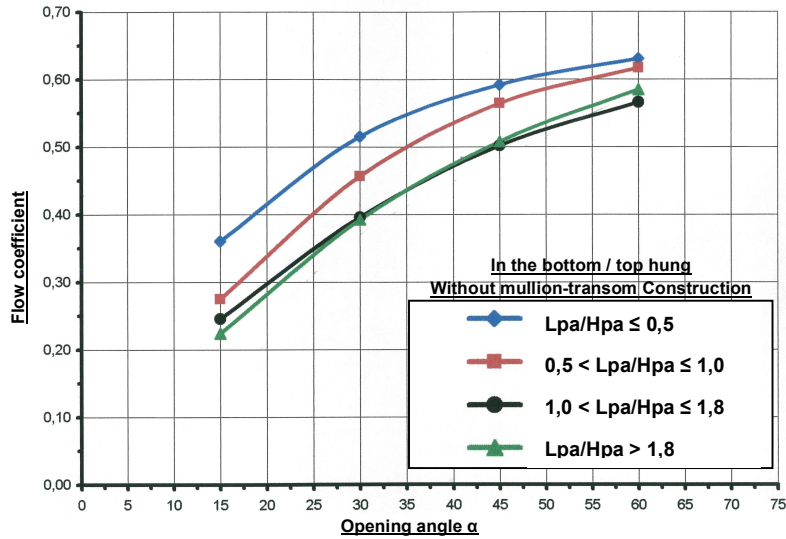

**** Cv : Calculation of flow coefficient With the influence of the "mullion-transom-construction":**

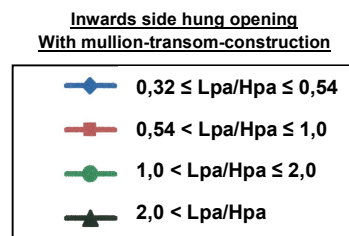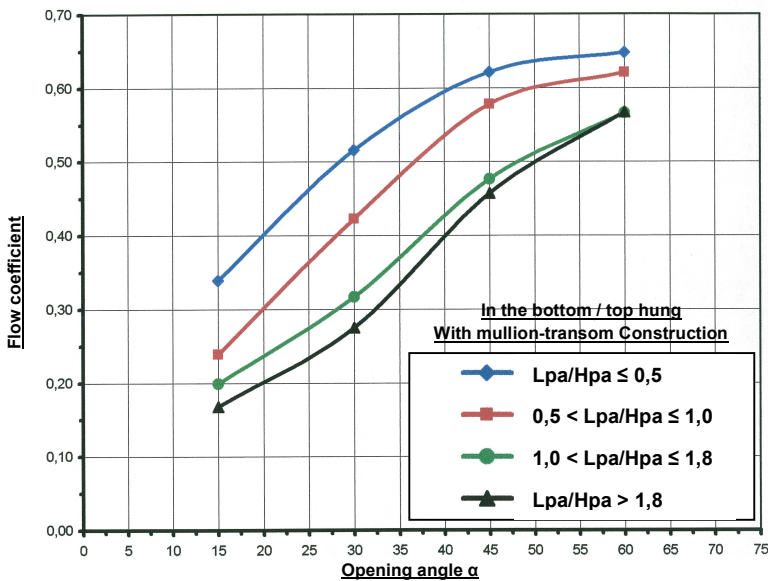

10. The performance of the product identified in points 1 et 2 is in conformity with the declared performance in point 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by: David Maillart – R&D Manager

Le 10/03/2025
In Collégien