

EDILSTICK

WPBIT0381.c

DESCRIPTION

EDILSTICK is a plastomeric self adhesive waterproofing membrane (APP), industrially manufactured by impregnation of the reinforcement with the waterproofing compound based on distilled bitumen modified with thermoplastic elastomeric polymers of the latest generation, which gives to the compound superior technical characteristics and thermoadhesive characteristic. The composite reinforcement, made of nonwoven polyester in combination with fiberglass, conveys good mechanical characteristics, excellent dimensional stability and elastic performance. Shaping of sheets, straightness, dimensional and surface uniformity are accomplished by hot calendering of the mass at hot melt fluid state. The lower surface is treated with a special bitumen-elastomer compound obtained from the combination of polyolefin polymers, thermoplastic elastomers and adhesive resins which make the membrane self-adhesive and self-sealing. The upper surface is coated with TEXface nonwoven polypropylene and selvedge protected by anti-adhesive release film for easy peel-and-stick overlaps. The lower surface is protected with anti-adhesive release film.

FIELD OF APPLICATION

The excellent quality of the product, the good mechanical characteristics, dimensional stability and cold flexibility, combined with a good resistance to atmospheric agents, allow application as an under layer in multilayer systems, coupled with compatible membranes, for waterproofing roofs. In general and refurbishments and in all situations where it is necessary to make a barrier to water. It is not suitable for use on garden roofs. The product is particularly suitable in all those cases in which, due to the characteristics of the laying surface (for example on expanded or extruded polystyrene thermal insulations, wooden roofing, etc.), or for safety reasons, it is not recommended or prohibited to use of open flames for the application of waterproofing membranes. Subsequent layers of bituminous membrane can be applied on EDILSTICK with a slight torching. EDILSTICK cannot remain exposed to UV rays for long periods. and cannot be protected with subsequent painting.

METHOD OF INSTALLATION

The good thermo-adhesive characteristics allow the membrane to be applied directly on the support without the use of a flame, removing the lower anti-adhesive protective film; for application, a minimum ambient and substrate temperature above 10-15 °C is required. In particular conditions, at lower temperatures, a moderate use of flame or hot air may be required to facilitate adhesion to the substrate and between the joints. In the case of multilayer systems, adhesion increases indirectly during the flame application of the top layer (both in BPP and BPE membranes), as the heat transmitted improves adhesion to the substrate and between the joints. Due to the thermo-adhesive behavior, the increase in ambient temperature favors the adhesion of the product over time. The membrane can be applied to any type of substrate such as: concrete, brick, sheet metal, wood, all types of insulating panels or other compatible membranes. The use of Elastocol 600, cold adhesion promoter, is essential for applications on cementitious substrates; recommended for metal and wood.


PACKING AND STORAGE

The product is packed as standing rolls on wooden pallets wrapped with thermoshrinking protective hoods. Rolls must be stored in the upright position, without stacking the pallets to avoid deformations which can compromise the correct application of the membrane. The product must be stored indoor, protected from heat and frost.

INTENDED USE OR USES

Flexible sheets for waterproofing. Reinforced bitumen sheets for roof waterproofing
Flexible sheets for waterproofing. Bitumen water vapour control layers
Flexible sheets for waterproofing. Bitumen damp proof sheets including bitumen basement tanking sheets
Flexible sheets for waterproofing. Underlays for discontinuous roofing

1. Auto-Adhesive Selvedge
2. Nonwoven polypropylene
3. Waterproofing mass
4. Reinforcement
5. Auto-Adhesive waterproofing mass
6. Anti-Adhesive removable film

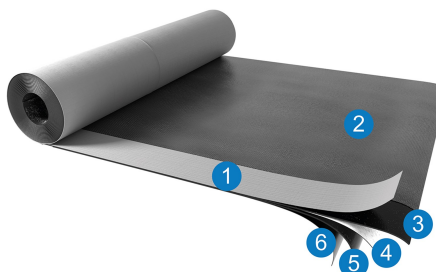

EDILSTICK


WPBIT0381.c

TECHNICAL DATA

| | Norm | Value | | Unit | Tolerance |
|--|------------------------|-------------|----|-----------|--------------|
| Thickness | EN1849-1 | 2 | 3 | (mm) | ±0,2 |
| Roll length | EN1848-1 | 15 | 10 | (m) | -1% |
| Roll width | EN1848-1 | 1 | 1 | (m) | -1% |
| Straightness | EN1848-1 | PASSED | | - | 20 mm / 10 m |
| Flexibility at low temperature (pliability) | EN1109 | -15 | | (°C) | ≤ |
| Heat flow resistance | EN1110 | 100 | | (°C) | ≥ |
| Watertightness | EN1928-B | 60 | | (kPa) | ≥ |
| Water vapour transmission properties | EN1931 | 20.000 | | (μ) | - |
| Tensile properties: maximum tensile strength | EN12311-1 | 550 / 450 | | (N/50 mm) | -20% |
| | | M.d. C.d. | | | |
| Tensile properties: elongation at break | EN12311-1 | 40 / 40 | | (%) | -15 |
| Resistance to tearing (nail shank) | EN12310-1 | 150 / 200 | | (N) | -30% |
| Dimensional stability | EN1107-1 | ±0,3 / ±0,3 | | (%) | ≤ |
| Shear resistance of joints | EN12317-1 | 550 / 450 | | (N/50 mm) | -20% |
| Resistance to static puncture | EN12730-A | NPD | | | |
| Resistance to impact | EN12691-A | NPD | | | |
| External fire performance (note 1) | EN1187/EN13501-5+A1 | Froof | | Class | - |
| Reaction to fire | EN11925-2/EN13501-1+A1 | E | | Class | - |
| Root resistance | EN13948 | NPD | | | |
| Visible defects | EN1850-1 | PASSED | | - | - |
| Durability: Flexibility at low temperature after artificial ageing | EN1296/EN1109 | -15 | | (°C) | +15 |
| Durability: Flow resistance at elevated temperature after artificial ageing | EN1296/EN1110 | NPD | | | |
| Durability: Watertightness after artificial ageing | EN1296/EN1928-B | PASSED | | (kPa) | ≥ 60 |
| Durability: Watertightness against chemicals | EN1296/EN1847 | NPD | | | |
| Artificial ageing by long term exposure to the combination of UV radiation and elevated temperature and heat: Tensile strength | EN1296/EN12311-1 | NPD | | | |
| Artificial ageing by long term exposure to the combination of UV radiation and elevated temperature and heat: Elongation | EN1296/EN12311-1 | NPD | | | |
| Artificial ageing by long term exposure to the combination of UV radiation and elevated temperature and heat: Watertightness | EN1296/EN1928-A | W1 | | Class | - |
| Substances dangereuses (notes 2 and 3) | - | CONFORMS | | - | |

NORMS

EN13707; EN13970; EN13969; EN13859-1



Base sheet
in multi-
layers
systems



Damp proof
courses



Foundations