

## PRESTIDALLE

### Description

**PRESTIDALLE** is a wooden decking tile for exterior roofs for pedestrian access. Wooden decking tiles can be installed on pads (fixed or adjustable) or directly on any support.

### Composition

**PRESTIDALLE** is a IPE wood tile, 7 slats (Green ebony from South America) olive-brown coloured.

### Characteristics

	PRESTIDALLE
Dimensions	50 cm x 50 cm
Thickness	38 mm (2 x 19 mm)
Configuration	7 surface grooved slats and 2 support slats
Number of screws	28 (stainless steel)
Puncture resistance (NF B 51-013)	14 class (Monnin test)
Tensile modulus with a flexibility of 12 %	18 800 N / mm <sup>2</sup>
Maximum load (NF EN 1339) (pedestrian access only)	T7 to T11 (collective and public use)

### Packaging

	PRESTIDALLE
Weight	32 kg/m <sup>2</sup>
Number of decks / bag	4 u (1 m <sup>2</sup> )
Number of bags / pallet	36 u
Number of m <sup>2</sup> / pallet	36 m <sup>2</sup>

### User application


**PRESTIDALLE** is used on balconies, patios, roof decks for pedestrian access.

All the applications are described in the French DTU, Technical Guidelines or Technical Approvals. For further details refer to the specific technical information.

# TECHNICAL DATA SHEET

N° DTE-13-020\_EN cancels and replaces DTE-11-091\_EN

## Installation

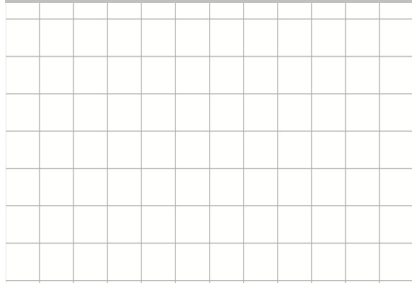

**PRESTIDALLE** is installed on pads. For aesthetic reasons, the installation in staggered pattern of **PRESTIDALLE** is recommended. A peripheral void, allowing the natural expansion of the wood, must be respected.

After adjustment of support pads, start by laying them at one corner of the area to be covered.

**PRESTIDALLE** can be taken up at any time to inspect deck, clean or carry out repairs.

## Special indications



### Hygiene, health and environment:

The product does not contain any substance likely to be detrimental to health or to environment and complies with generally admitted Health and Safety Requirements. For further information, please refer to relevant Safety Data Sheet.

### Quality control:

**SOPREMA** has always attached the highest importance to Quality Control.

For this reason, we operate an independently monitored Quality Assurance System in compliance with **BS EN ISO 9001: 2008**, certified by **BSI Management System**.

