

FLAGON PVC EXTERNAL CORNER

Description

The **FLAGON PVC EXTERNAL CORNER** is a prefabricated element composed of flexible FLAGON PVC.


The **FLAGON PVC EXTERNAL CORNER** is used in the waterproofing of external 90° corners of FLAGON PVC-waterproofing systems.

It is characterized by a high resistance to weathering and UV-rays.

Characteristics & packing



EXTERNAL 90° CORNER 95

Dimension x (mm)	95
Dimension y (mm)	95
Height h (mm)	95
Thickness (mm)	2,2
Pieces/pack	20
Weight (kg)	0,065
Colour	grey
Application temperature (°C)	>+5
Storage conditions (°C)	>+5



EXTERNAL 90° CORNER 145

Dimension x (mm)	165
Dimension y (mm)	165
Height h (mm)	145
Thickness (mm)	2,2
Pieces/pack	20
Weight (kg)	0,292
Colour	grey
Application temperature (°C)	>+5
Storage conditions (°C)	>+5

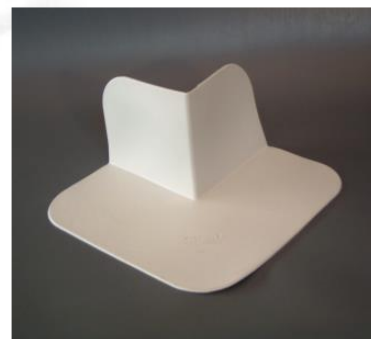

Installation

Used in the waterproofing of external 90° corners of FLAGON PVC-waterproofing systems.

The **FLAGON PVC EXTERNAL CORNER** is welded with hot air.

Special indications

Hygiene, Health and Environment

The product does not contain any substance which is likely to be detrimental to your health or to the environment and complies with generally admitted Health and Safety Requirements.

Quality-, Environment- and Safety Management

SOPREMA always recognises as a high level of importance the quality of the products, the environment and safety.

For this reason, we operate independently monitored Quality and Environment Assurance Systems in line with

EN ISO 9001 and **EN ISO 14001**.

SOPREMA reserves the right to amend the composition of its material and consequently their prices, without prior notice. For this reason, all orders will be accepted only in accordance with the conditions and technical specifications in force at the date of order.

Contact: www.soprema.com