

## FLAGON PVC Rainwater Outlet


### Description

The FLAGON PVC Rainwater Outlet is made of flexible PVC.  
FLAGON PVC Rainwater Outlets are used for the vertical evacuation of rainwater from the roof surface.  
It is distinguished by a high resistance to weathering and UV-rays.

### Characteristics & packing

Ø drain pipe* (d1) (mm)	40	60	75	80	90	100	110	125	140	150	160	200
Ø internal (d2) (mm)	26	48	65	69	77	89	91	114	127	136	146	185
Ø external (d3) (mm)	33	53	70	74	82	94	97	119	132	141	151	190
Ø flange (x) (mm)	235	235	320	280	320	300	320	320	380	380	380	440
Length (h) (mm)	240											
Thickness (mm)	3,0											
Pieces/box	10											

\* the diameter refers to the diameter of the drain pipe to which the outlet can be connected air- and watertight

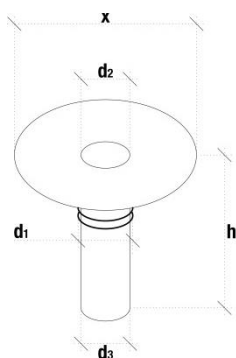

### Installation

Used for the vertical evacuation of rainwater in combination with flexible PVC waterproofing systems.  
The flange is welded with hot air.

### Special indications

#### Hygiene, Health and Environment

The product does not contain any substance which is likely to be detrimental to your health or to the environment and complies with generally admitted Health and Safety Requirements.  
For more information, please refer to the relevant safety data sheet.

#### Quality-, Environment- and Safety Management

**SOPREMA** always recognises as a high level of importance the quality of the products, the environment and safety.  
For this reason, we operate independently monitored Quality and Environment Assurance Systems in line with **EN ISO 9001** and **EN ISO 14001**.

**SOPREMA** reserves the right to amend the composition of its material and consequently their prices, without prior notice. For this reason, all orders will be accepted only in accordance with the conditions and technical specifications in force at the date of order.

Contact: [www.soprema.com](http://www.soprema.com)