





# TEXLOSA INSULATION TILE

FOR NEW  
BUILDINGS AND  
REFURBISHMENT  
WORKS




TEXLOSA R Grey



TEXLOSA R White

ENERGY SAVING

Complies with DTU serie 43

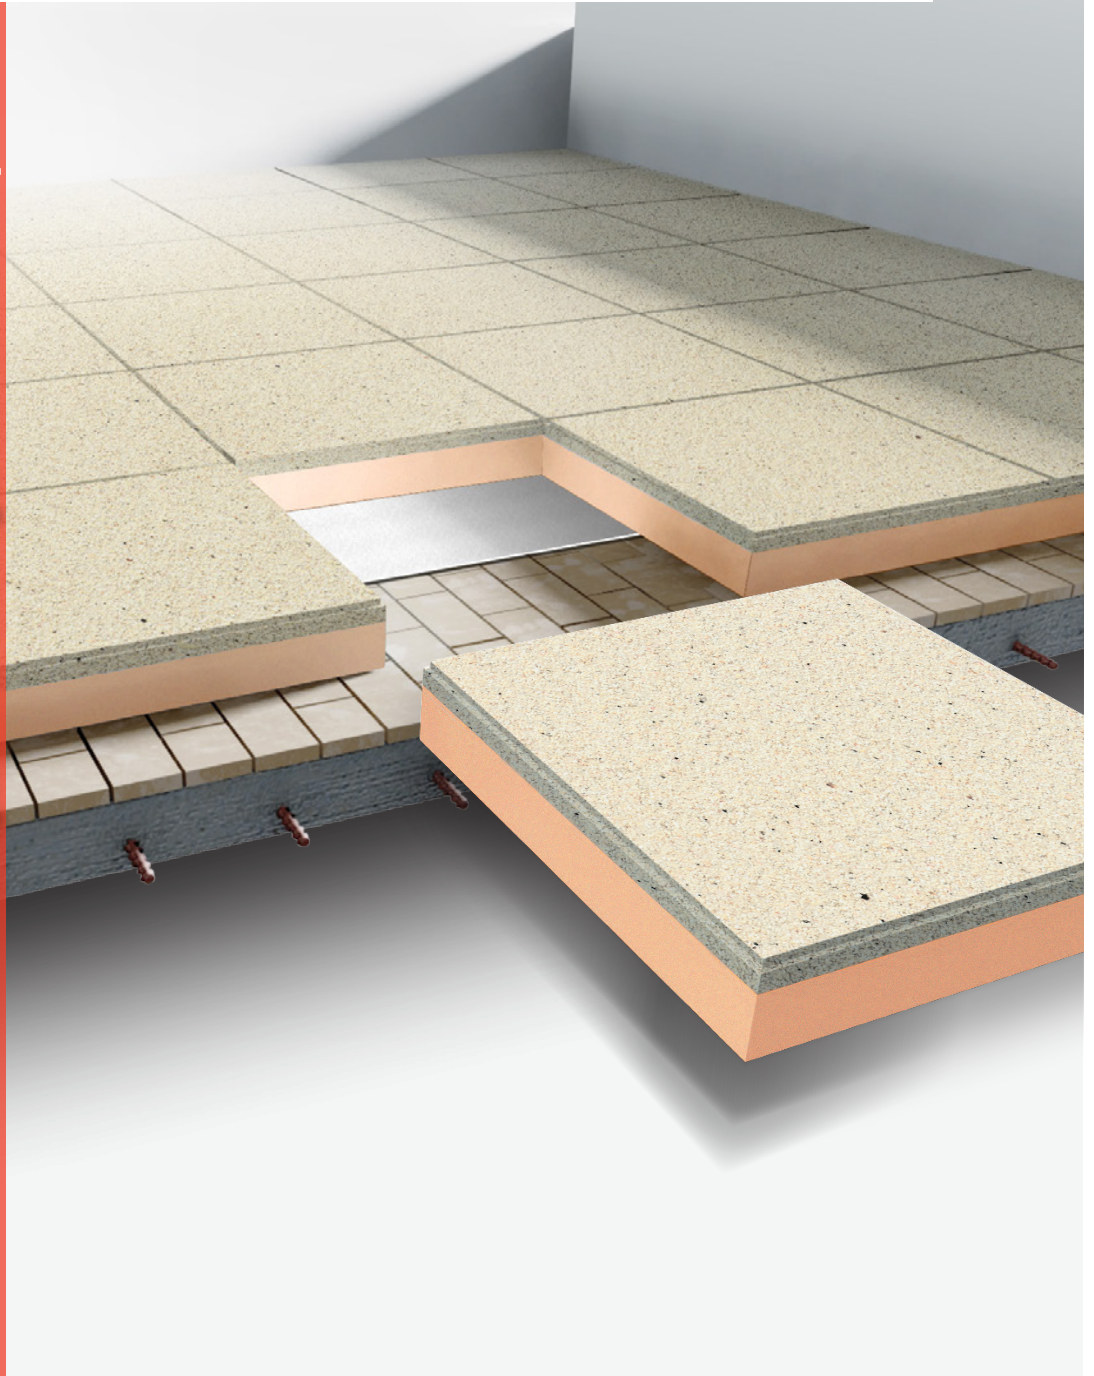

# ADVANTAGES

- › Insulation, drainage, heavy top layer in only one product
- › Easy installation, maintenance and quick access to waterproofing membrane
- › Enable creation of new spaces transforming non accesible in accesible roof for maintenance and private uses
- › High durability due to its resistance to weathering and temperature changes
- › More economical alternative to gravel finish roofs
- › Closed-cell structure insulation and excellent thermal conductivity
- › Homogeneous thermal insulation layer available in different thicknesses
- › Mortar scredd with good compressive and flexotraccion strenght
- › Drainage through surface and smooth tile edges
- › Smooth edges allow free mouvement of the tiles

# APPLICATION

- › Inverted flat roofs, accesible (only for maintenance and installations) and technical roofs
- › Extensive green roofs
- › Roofs refurbishment
- › Creation of walkaway in roofs with limited accessibility
- › Ancillary product in gravel finished roofs


**TEXLOSA** is an insulating tile of 600 x 600 mm consisting of a layer of extruded polystyrene foam XPS with closed cell structure, self protected on the upper side with a 35 mm layer of mortar, composed of selected aggregates and special additives, with a rough finishing.

CODE	PRODUCT	THICKNESS	PACKAGING	40 FEET CONTAINER	THERMAL RESISTANCE (R)
00113704	TEXLOSA 30 / 35 R GREY	30 (l) + 35 (m)	40 Tiles / Pallet 14,40 m <sup>2</sup>	324 m <sup>2</sup> / 900 tiles	0,9
00109560-GRIS	TEXLOSA 40 / 35 R GREY	40 (l) + 35 (m)	44 Tiles / Pallet 15,84 m <sup>2</sup>	356,4 m <sup>2</sup> / 900 tiles	1,2
00109561-GRIS	TEXLOSA 50 / 35 R GREY	50 (l) + 35 (m)	40 Tiles / Pallet 14,40 m <sup>2</sup>	324 m <sup>2</sup> / 900 tiles	1,5
00109595-GRIS	TEXLOSA 60 / 35 R GREY	60 (l) + 35 (m)	40 Tiles / Pallet 14,40 m <sup>2</sup>	324 m <sup>2</sup> / 900 tiles	1,8
00113647	TEXLOSA 30 / 35 R WHITE	30 (l) + 35 (m)	48 Tiles / Pallet 17,28 m <sup>2</sup>	324 m <sup>2</sup> / 900 tiles	0,9
00109597-BLANCO	TEXLOSA 40 / 35 R WHITE	40 (l) + 35 (m)	40 Tiles / Pallet 14,40 m <sup>2</sup>	356,4 m <sup>2</sup> / 900 tiles	1,2
00109598-BLANCO	TEXLOSA 50 / 35 R WHITE	50 (l) + 35 (m)	36 Tiles / Pallet 12,96 m <sup>2</sup>	324 m <sup>2</sup> / 900 tiles	1,5
00109596-BLANCO	TEXLOSA 60 / 35 R WHITE	60 (l) + 35 (m)	36 Tiles / Pallet 12,96 m <sup>2</sup>	324 m <sup>2</sup> / 900 tiles	1,8

(m): mortar composed of selected aggregates and special additives.  
(l): XPS extruded polystyrene insulation.

## TEXLOSA NT-01-02.2


Accessible (maintenance and private uses) inverted flat roof with bituminous waterproofing membranes and **TEXLOSA** as top heavy layer.

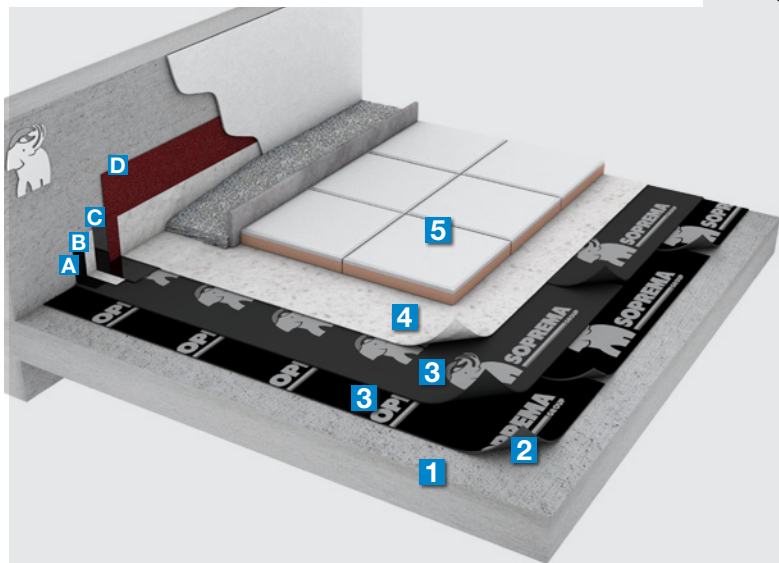

1. Resistant support: Concrete / mortar screed
  2. Primer: **EMUFAL PRIMER**
  3. Bituminous waterproofing:  
**MOPLY N PLUS FV 3 kg + MOPLY N PLUS FP 3 kg** or  
**MORTERPLAS FV 3 kg + MORTERPLAS FP 3 kg** or  
**MORTERPLAS SBS FV 3 kg + MORTERPLAS SBS FP 3 kg**
  4. Separating layer: **ROOFTEX V 300 / TEXXAM 1000**
  5. Insulating and draining tile: **TEXLOSA**
- Upstand:**
- A. Waterproofing: **TEXTOP** (waterproofing resine)
  - B. Reinforcement: **TEXTIL**
  - C. Waterproofing: 2 layers 900 + 700 g **TEXTOP**
  - D. Optional finishing: **Pizarrita**

## TEXLOSA T-01-02.C


Accessible (maintenance and private uses) inverted flat roof with single-ply waterproofing membrane and **TEXLOSA** as top heavy layer.

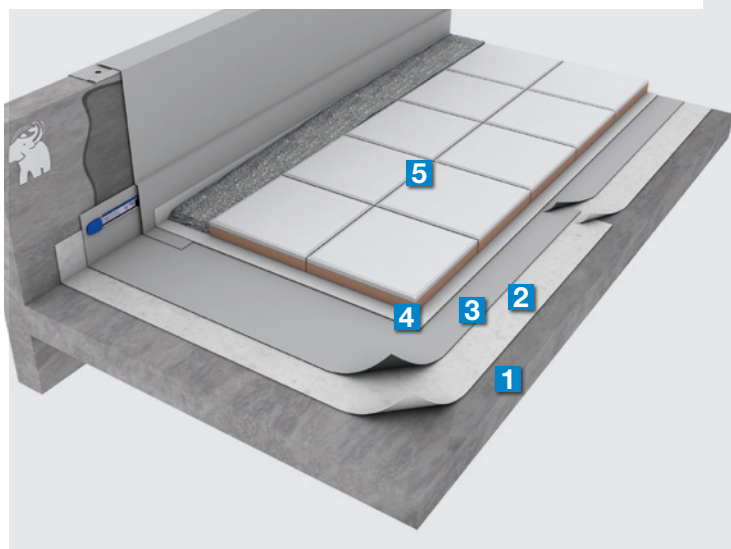

1. Resistant support: Concrete / mortar screed
2. Separating layer: **ROOFTEX V 200 / TEXXAM 700**
3. Synthetic waterproofing:  
PVC: **FLAGON® SV**  
TPO: **FLAGON® EP / PV**
4. Filtration / Drainage: **ROOFTEX V 300 / TEXXAM 700**
5. Insulating and draining tile: **TEXLOSA**

## TEXLOSA NT-02-08.2

Non Accessible inverted green extensive flat roof with bituminous waterproofing membrane and **TEXLOSA** as top heavy layer.

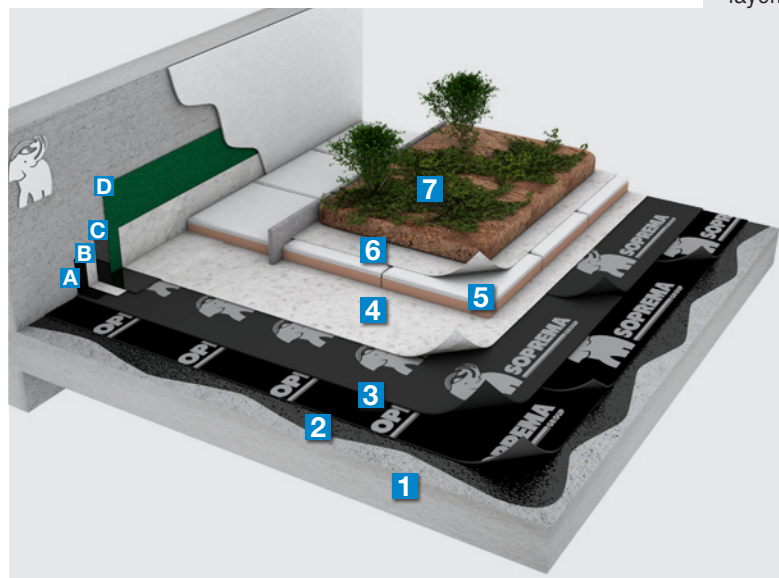

1. Resistant support: Concrete / mortar screed
  2. Primer: **EMUFAL PRIMER**
  3. Waterproofing: **MOPLY N PLUS FV 3 kg + MORTERPLAS FP 4 kg GARDEN**
  4. Separating layer: **TEXXAM 700**
  5. Insulating and draining tile: **TEXLOSA**
  6. Separating layer: **TEXXAM 700**
  7. Substrate and soil finishing
- Upstand:**
- A. Waterproofing: **TEXTOP** (waterproofing resine)
  - B. Reinforcement: **TEXTIL**
  - C. Waterproofing: 2 layers 900+ 700 g **TEXTOP**
  - D. Optional finishing: **Pizarrita**



## **SOPREMA Group at your service**

Do you need to get in contact with us ?

Please contact our Customer Service:  
Phone: (+34) 93 635 14 00

**Any questions concerning intallation or need a technical advise?**

**Please contact our Technical Support:**

Cell phone: + 34 619 641 129  
Office phone: + 34 93 635 14 93  
Email: fperez@soprema.com

**All info available on our web site:**

**[www.soprema.pt](http://www.soprema.pt)**

**SOPREMA**  
GROUP

[www.soprema.pt](http://www.soprema.pt)



ER-0280/1994



UNE-EN ISO  
9001:2008

Soprema, S.A.  
Zona Industrial de Alpiarça,  
Rua A, Lote 4 B  
2090 242 ALPIARÇA

August 2018