

PRODUCT INFORMATION

DESCRIPTION

The WALL OUTLET ENDS is an element made in HDPE obtained by molding.

USE

The WALL OUTLET ENDS is used in combination with the wall outlet made of Flagon PVC (see technical data sheet) or Flagon TPO (see technical data sheet) to connect these to the vertical drain pipes.

APPLICATION


The WALL OUTLET ENDS is applied by inserting the wall outlet on one side and the downpipe on the other.

CHARACTERISTIC

- Resistant to weathering and UV

CHARACTERISTIC

Height	z	65 mm	100 mm
Height	y	60 mm	95 mm
External Diameter	x	75 mm	95 mm
Thickness	-	2,5 mm	2,5 mm

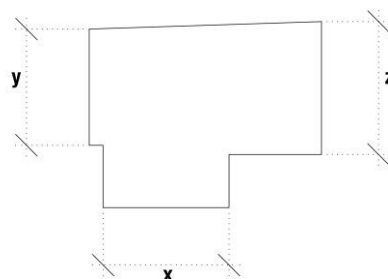

PACKAGING

Number of pieces for each pack	10 pz
Weight	0,158 kg/pz
Colour	brown



NOTE

Laying by installer approved by Soprema srl.

UNI EN ISO 9001 (Quality Company System) and UNI EN ISO 14001 (environmental system) certified quality system.

The data herewith indicated are not exhaustive and Soprema srl may modify them without previous notice. Soprema srl, has the right to modify the product at any time and without previous notice, in any of its aspect, and to stop its production. In case of dispute the official version of this sheet product information will be provided directly by the technical office Soprema srl stamped and signed by the technical manager. Soprema srl reserves the right, as technology and know-how progress, to modify without warning the composition and conditions of use of its materials, and subsequently their price. As a result, orders shall only be accepted on the basis of the terms and technical specifications applicable at the time of receipt.