



SOPREMA

Bituminous waterproofing solutions



aquadere[®] &
aquadere[®] stick

primer
substrate
solvent-free

SOPREMA
GROUP



aquadere & aquadere stick

- Solvent free
- No carrying issue
- Not flammable
- Easy to apply
- Perfect adherence to the support
- Easy management of waste
- Tools can be clean with water



AQUADERE®



Aquadere® is a ready-to-use cold-applied bitumen emulsion primer (solvent free). **Aquadere®** is used as cold-applied primer, to increase adherence for bitumen-based waterproofing membranes. It's also used as a bituminous coating for buried walls and foundations.

AQUADERE® STICK



Aquadere® Stick is a ready-to-use cold-applied bitumen emulsion primer (solvent free). **Aquadere® Stick** is specially used for self-adhesive waterproofing membranes.

INSTALLATION: AQUADERE OR AQUADERE STICK IN 3 STEPS

Apply a sufficient quantity of **Aquadere®** or **Aquadere® Stick** on the surface, approximately: 0.250 l/m² to 0.350 l/m² (depending on substrate).



1
Surface must be clean without rust.
Use flam if required or mechanical methods.
Product must be applied with a brush or roller or sprayed onto dry, clean surfaces, free of non-adhesive materials.
Metal surfaces must be degreased beforehand.




2
Aquadere® or Aquadere® stick must be well mixed to obtain a proper homogenization of components.
Ensure that the tools are clean and free of any substances that may hinder the emulsion process.
Apply the product removing air bubbles and wrinkles with a roller or a brush.




3
Do not wet the surface until product is not completely dry. Product must be dry before applying waterproofing membranes.
Visual inspection: Aquadere® or Aquadere® stick form a perfect black film finish. The presence of brown traces shows incomplete drying.

APPROXIMATE CONSUMPTION:

On rough and absorbent substrate (i.e. concrete, wood):
5 L can covers about 20 m², 25 L can covers about 100 m².
On smooth, non-absorbent substrate (i.e. metal), the approximate consumption may be lower.



AVERAGE DRYING TIME ON CONCRETE SUBSTRATE

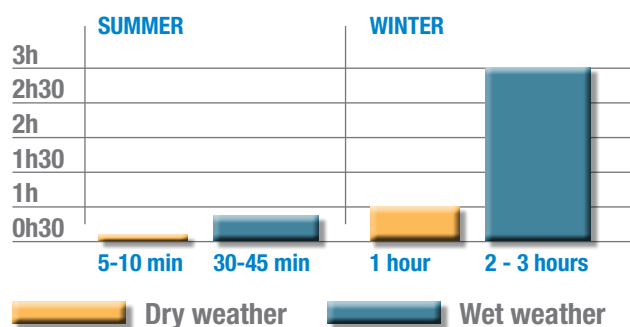

SOPREMA GROUP at your service

Looking for a sales contact in order to discuss a future project or a project that is under way? Any questions about the implementation of our product range?

Contact Soprema Export Department

Tel.: +33 (0)3 88 79 84 84 - Fax: +33 (0)3 88 79 84 85

Email: export@soprema.com Find all the information on www.soprema.com



e-mail: contact@soprema.com - www.soprema.com