TPO FLAGMETAL STRIP

Technical Data Sheet N° MISIT0141.b
Cancels and replaces MISIT0141.a

PRODUCT INFORMATION

DESCRIPTION
The TPO FLAGMETAL STRIP is made of galvanized steel coupled with FLAGON TPO membrane.

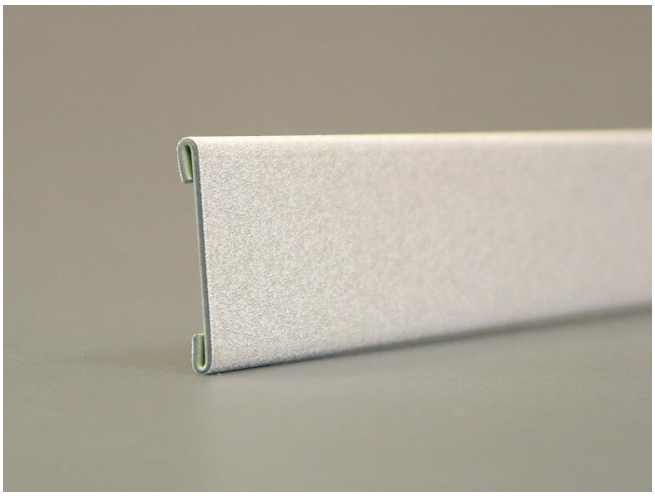

USE
The TPO FLAGMETAL STRIP is used on roofing as a fastening element for the closure of the verticals under the cap in waterproofing systems realized with FLAGON TPO synthetic membranes.

APPLICATION METHOD
The TPO FLAGMETAL STRIP is fixed with screws on the vertical.
It is advisable to place appropriate sealing underneath.
The Flagon TPO membrane is welded with Leister hot air gun over the entire length of the TPO Flagmetal Strip.

CHARACTERISTIC
- Resistant to weathering and UV

CHARACTERISTIC

- **DEVELOPMENT**



Total development - development a - development b	- a b	50 mm 40 mm 5 mm
Total thickness - metal sheet thickness - TPO membrane thickness	- - -	1,80 mm 0,60 mm 1,20 mm

STORAGE AND PACKAGING



Number of pieces for each pack	10 pz
Weigh	0,27 kg/m
Length	2 m
Color	Sand grey

NOTE
Laying by installer approved by Soprema srl.

UNI EN ISO 9001:2000 (Quality Company System) and UNI EN ISO 14001 (environmental system) certified quality system.

Rev. 12.03.2021/EN

The data herewith indicated are not exhaustive and Soprema srl may modify them without previous notice. Soprema srl, has the right to modify the product at any time and without previous notice, in any of its aspect, and to stop its production. In case of dispute the official version of this sheet product information will be provided directly by the technical office Soprema srl stamped and signed by the technicial manager. Soprema srl reserves the right, as technology and know-how progress, to modify without warning the composition and conditions of use of its materials, and subsequently their price. As a result, orders shall only be accepted on the basis of the terms and technical specifications applicable at the time of receipt.

Italy : **SOPREMA srl**
Via Industriale dell'Isola, 3 – 24040 – Chignolo d'Isola (BG)
Tel. : **+39 035 095.10.11 -** Fax : **+39 035 494.06.49**
www.flag-on.com **e-mail: tech-office@soprema.it**
www.soprema.it